

G-COAT

Screen-coating unit



Characteristics

Unique construction based on a central carriage guide system

Top quality – low price

“PLUG & COAT” construction:

Unpack, set up, coat

Safe reproducibility +/- 1 micron

Automatic coating process from one side

Coating from the printing side or from the squeegee side

Relevant coating parameters adjustable


The height of the mechanical frame support can be easily adjusted

Extremely low maintenance model

Machine-size


Width: 1250 mm (50")

Height: 1250 mm (50") & 1500 mm (59")

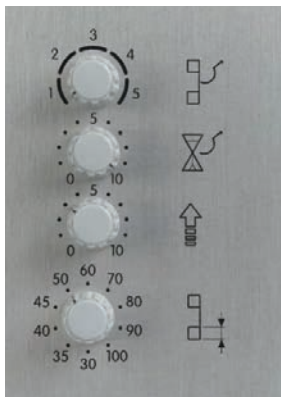

Coating parameters

- coating cycles
- dwell time
- coating speed

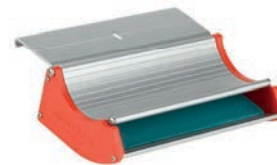

coating channel